

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
I	PRELIMINARY RELEASE	11/19/19	MKH
A	RELEASE TO PRODUCTION	02/26/21	MKH
B	DCN 90860: UPDATE TERMINATION PLATING CODE	03/23/22	MKH

HOW TO ORDER						
SAMPLE PART NUMBER	GTBA	-120	P	RA	-.109	-X -489
SERIES	GTBA - PCB CONNECTOR WITH MOUNTING EARS, .100" SPACING					
CONTACT LAYOUT (1 BAY) (2 BAY)	10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, 70 90, 100, 120					
CONTACT TYPE	P - PIN					
TERMINATION TYPE	RA - PCB RIGHT ANGLE					
TERMINAL LENGTH (SEE DETAIL VIEWS FOR AVAILABLE OPTIONS)	LENGTH IN INCHES ±.010 .109 .140 .172					
HARDWARE OPTION ¹	OMIT FOR NONE X - GUIDESET, FULL ROUND Y-# - GUIDESET, POLARIZED F - FIXED JACKSET S - TURNING JACKSET, SLOTTED HEAD H - TURNING JACKSET, HEX HEAD M - TURNING JACKSET, SLOTTED HEAD, MEDIUM LONG L - TURNING JACKSET, SLOTTED HEAD, LOING					
GOLD-PLATED TERMINAL MOD CODE	THESE CONNECTORS ARE SOLDER-DIPPED IN 60/40 TIN-LEAD SOLDER. TO DELETE THE SOLDER DIP AND CHANGE TO GOLD-PLATED TERMINALS, ADD CODE 513					
¹ SEE GTB-1001 FOR HARDWARE OPTION DETAILS.						



Performance Specifications:

- Current Rating - 5 AMP
- DWV - 1000 VAC Sea Level
- Insulation Resistance - 5000 Megohms Minimum @ 500 VDC
- Contact Resistance - 10 Milliohms
- Operating Temperature - -65° C. to +125°C.
- Mating Force (Max) - (4 Ounces) X (# of Contacts)
- Durability - 500 Mating Cycles

Materials and Finishes:

- Insulator - Polyphenylene Sulfide (PPS)
- Contacts - Copper Alloy, Gold over Nickel Plating
- Hardware - Copper Alloy, Nickel Plated and/or 300 Series Stainless Steel, Passivated

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC WITHOUT THE WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN	DFC	11/19/19	 GLENAIR, INC. 1211 AIR WAY, GLENDALE, CALIFORNIA 91201			
	CHECK	MKH	11/19/19				
	ENGR	MKH	11/19/19				
TOLERANCES: FRACTIONS ±1/16 SYMMETRY ϕ ±.002 RADII ±.005 DECIMALS .X ±.1 .XX ±.01 .XXX ±.005 .XXXX ±.0010 ANGLES ±2°	 APPROVED		TITLE PRINTED CIRCUIT BOARD CONNECTOR R/A PLUG W/ MOUNTING EARS 22 AWG, .100" SPACING				
DO NOT SCALE THIS DRAWING	RELEASE DATE	12/27/19		CODE IDENT. NO. 06324 SIZE C DWG NO GTBA-RA REV B			
B/F	P/C	98	ORIGINAL RELEASE DATE	11/19/19	SCALE: N/A	WEIGHT: N/A	SHEET 1 OF 3



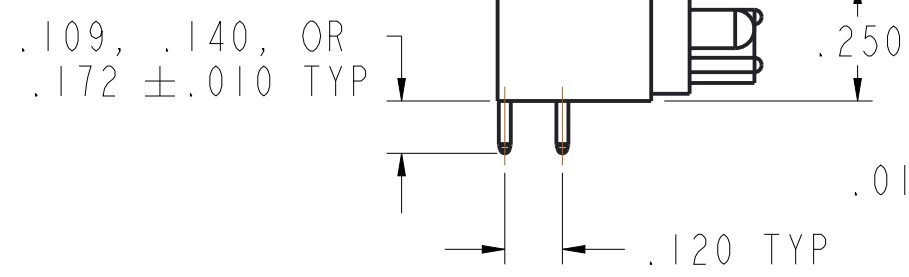


FIGURE 1. PLUG CONNECTOR, RIGHT ANGLE PIN CONTACTS (1 BAY)

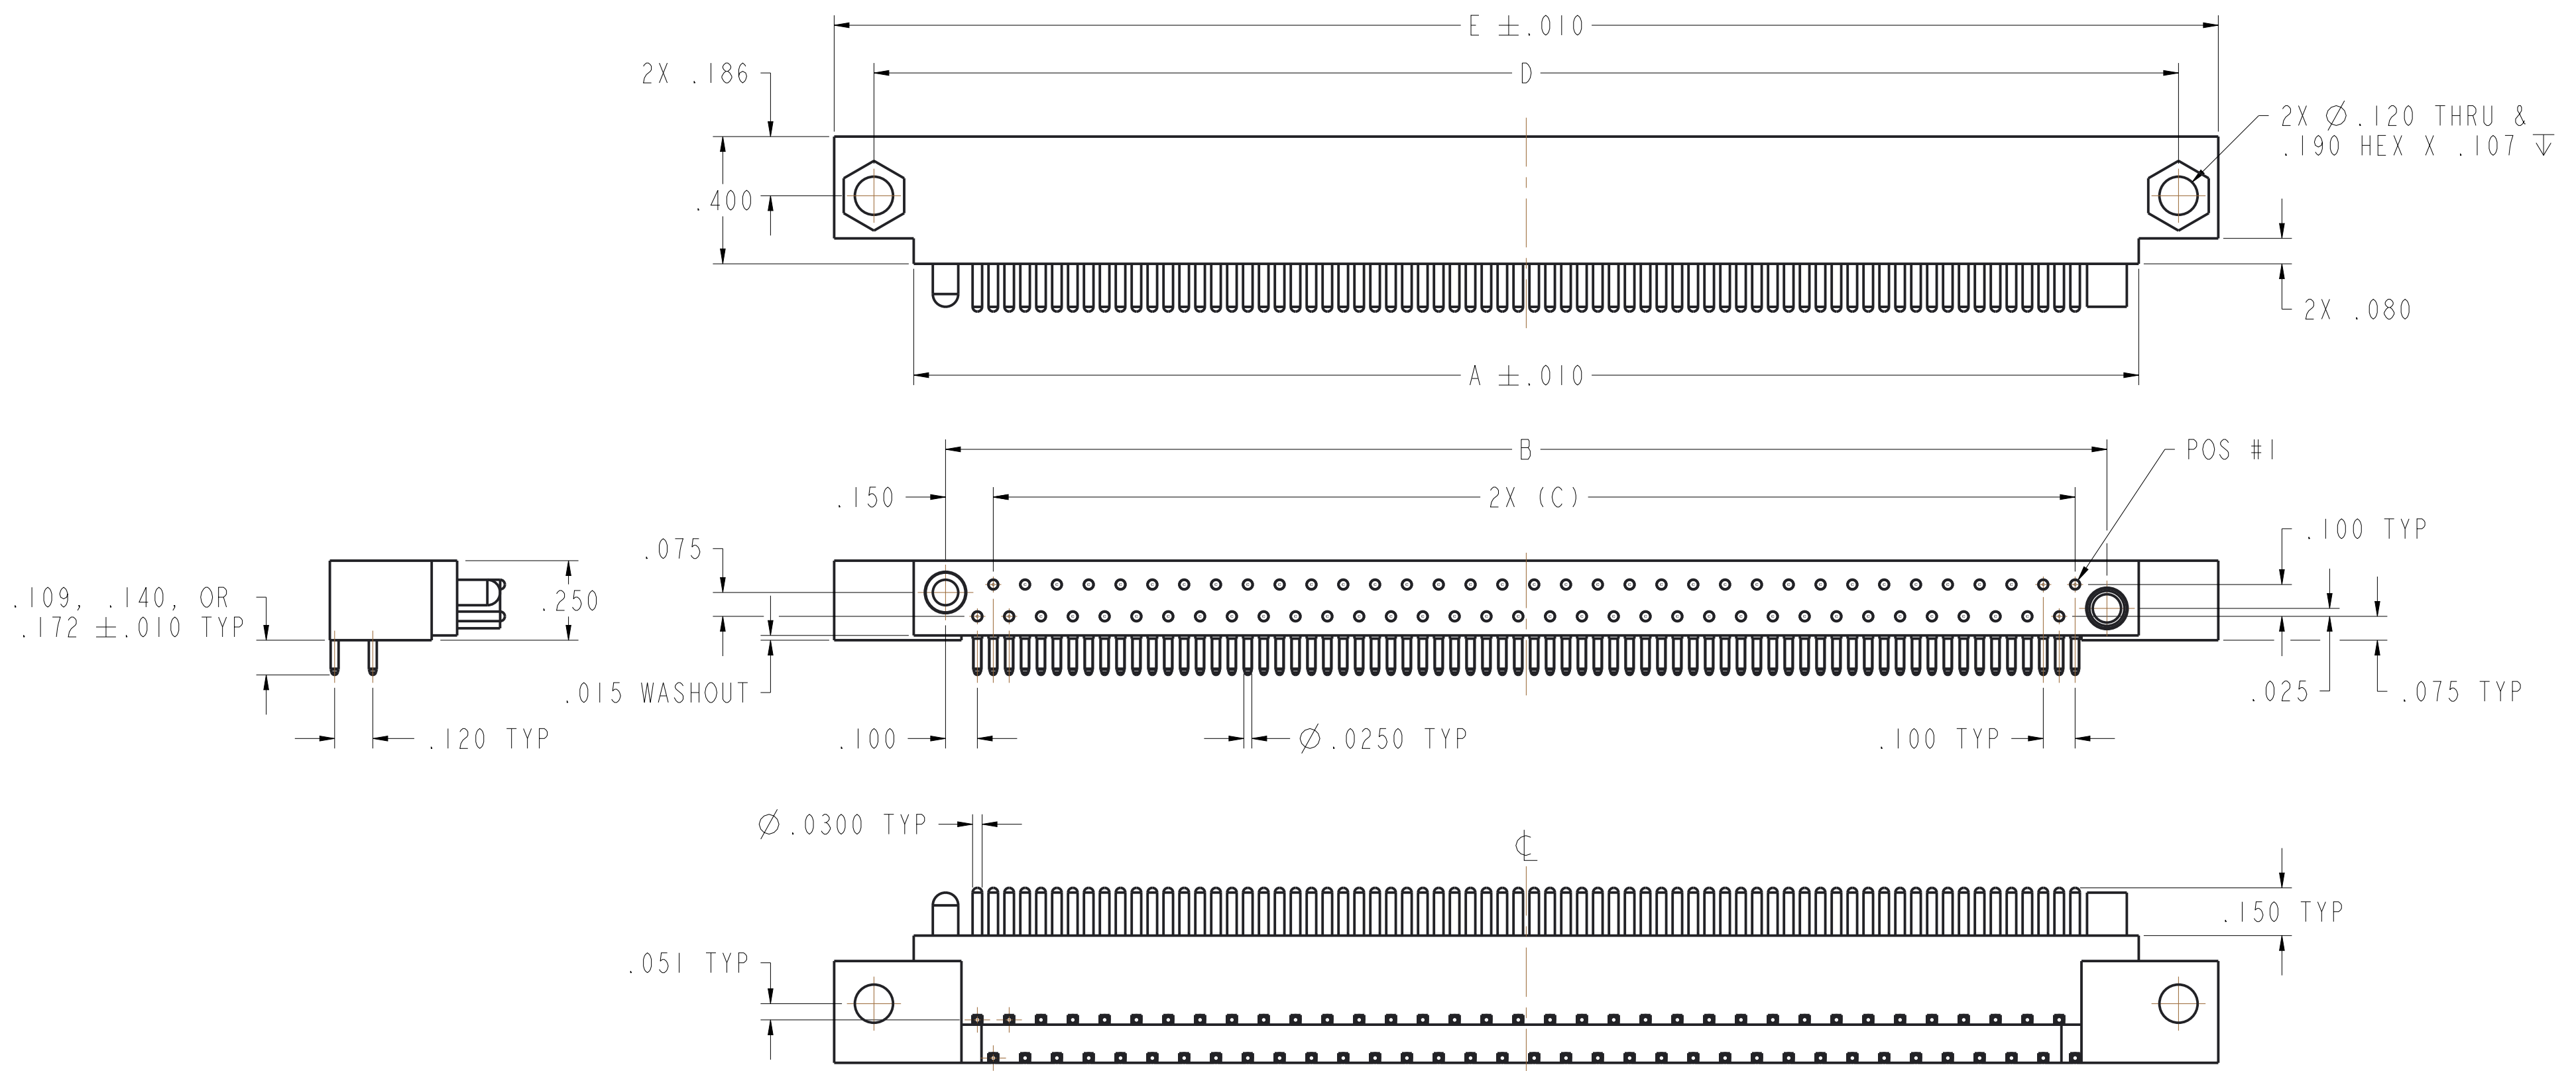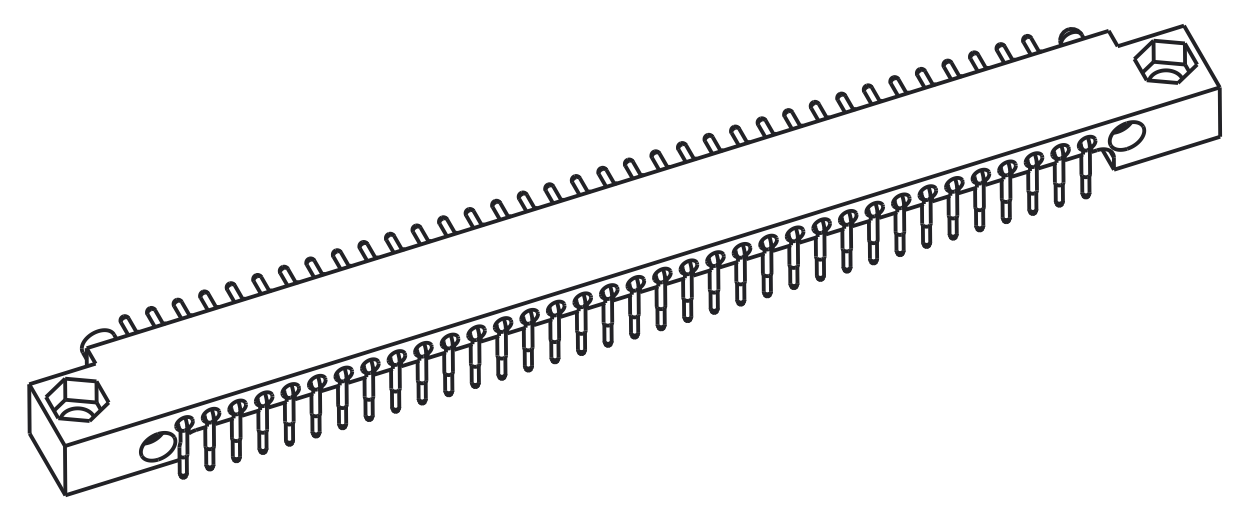

CONTACT LAYOUT	DIMENSIONS				
	A	B	C	D	E
10	.850	.650	.400	1.100	1.350
14	1.050	.850	.600	1.300	1.550
20	1.350	1.150	.900	1.600	1.850
24	1.550	1.350	1.100	1.800	2.050
26	1.650	1.450	1.200	1.900	2.150
30	1.850	1.650	1.400	2.100	2.350
36	2.150	1.950	1.700	2.400	2.650
40	2.350	2.150	1.900	2.600	2.850
44	2.550	2.350	2.100	2.800	3.050
50	2.850	2.650	2.400	3.100	3.350
54	3.050	2.850	2.600	3.300	3.550
56	3.150	2.950	2.700	3.400	3.650
60	3.350	3.150	2.900	3.600	3.850
66	3.650	3.450	3.200	3.900	4.150
70	3.850	3.650	3.400	4.100	4.350

REFER TO DRAWING GTB-1002 FOR R/A PCB LAYOUT PATTERNS

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC. WITHOUT THE WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.

GLENAIR, INC.
1211 AIR WAY, GLENDALE, CALIFORNIA 91201

TITLE
PRINTED CIRCUIT BOARD CONNECTOR
R/A PLUG W/ MOUNTING EARS
22 AWG, .100" SPACING

CODE IDENT. NO.	SIZE	DWG NO	REV
06324	C	GTBA-RA	B
SCALE: N/A	WEIGHT: N/A	SHEET 2 OF 3	

NOTES: UNLESS OTHERWISE SPECIFIED...

1. ASSEMBLY TO BE IDENTIFIED WITH GLENAIR NAME, CAGE CODE, P/N, AND DATE CODE. NUMBERS INDICATING THE FIRST AND LAST POSITION AND EVERY FOURTH CONTACT POSITION IN BETWEEN SHALL BE MARKED ON THE TOP SIDE OF THE CONNECTOR.

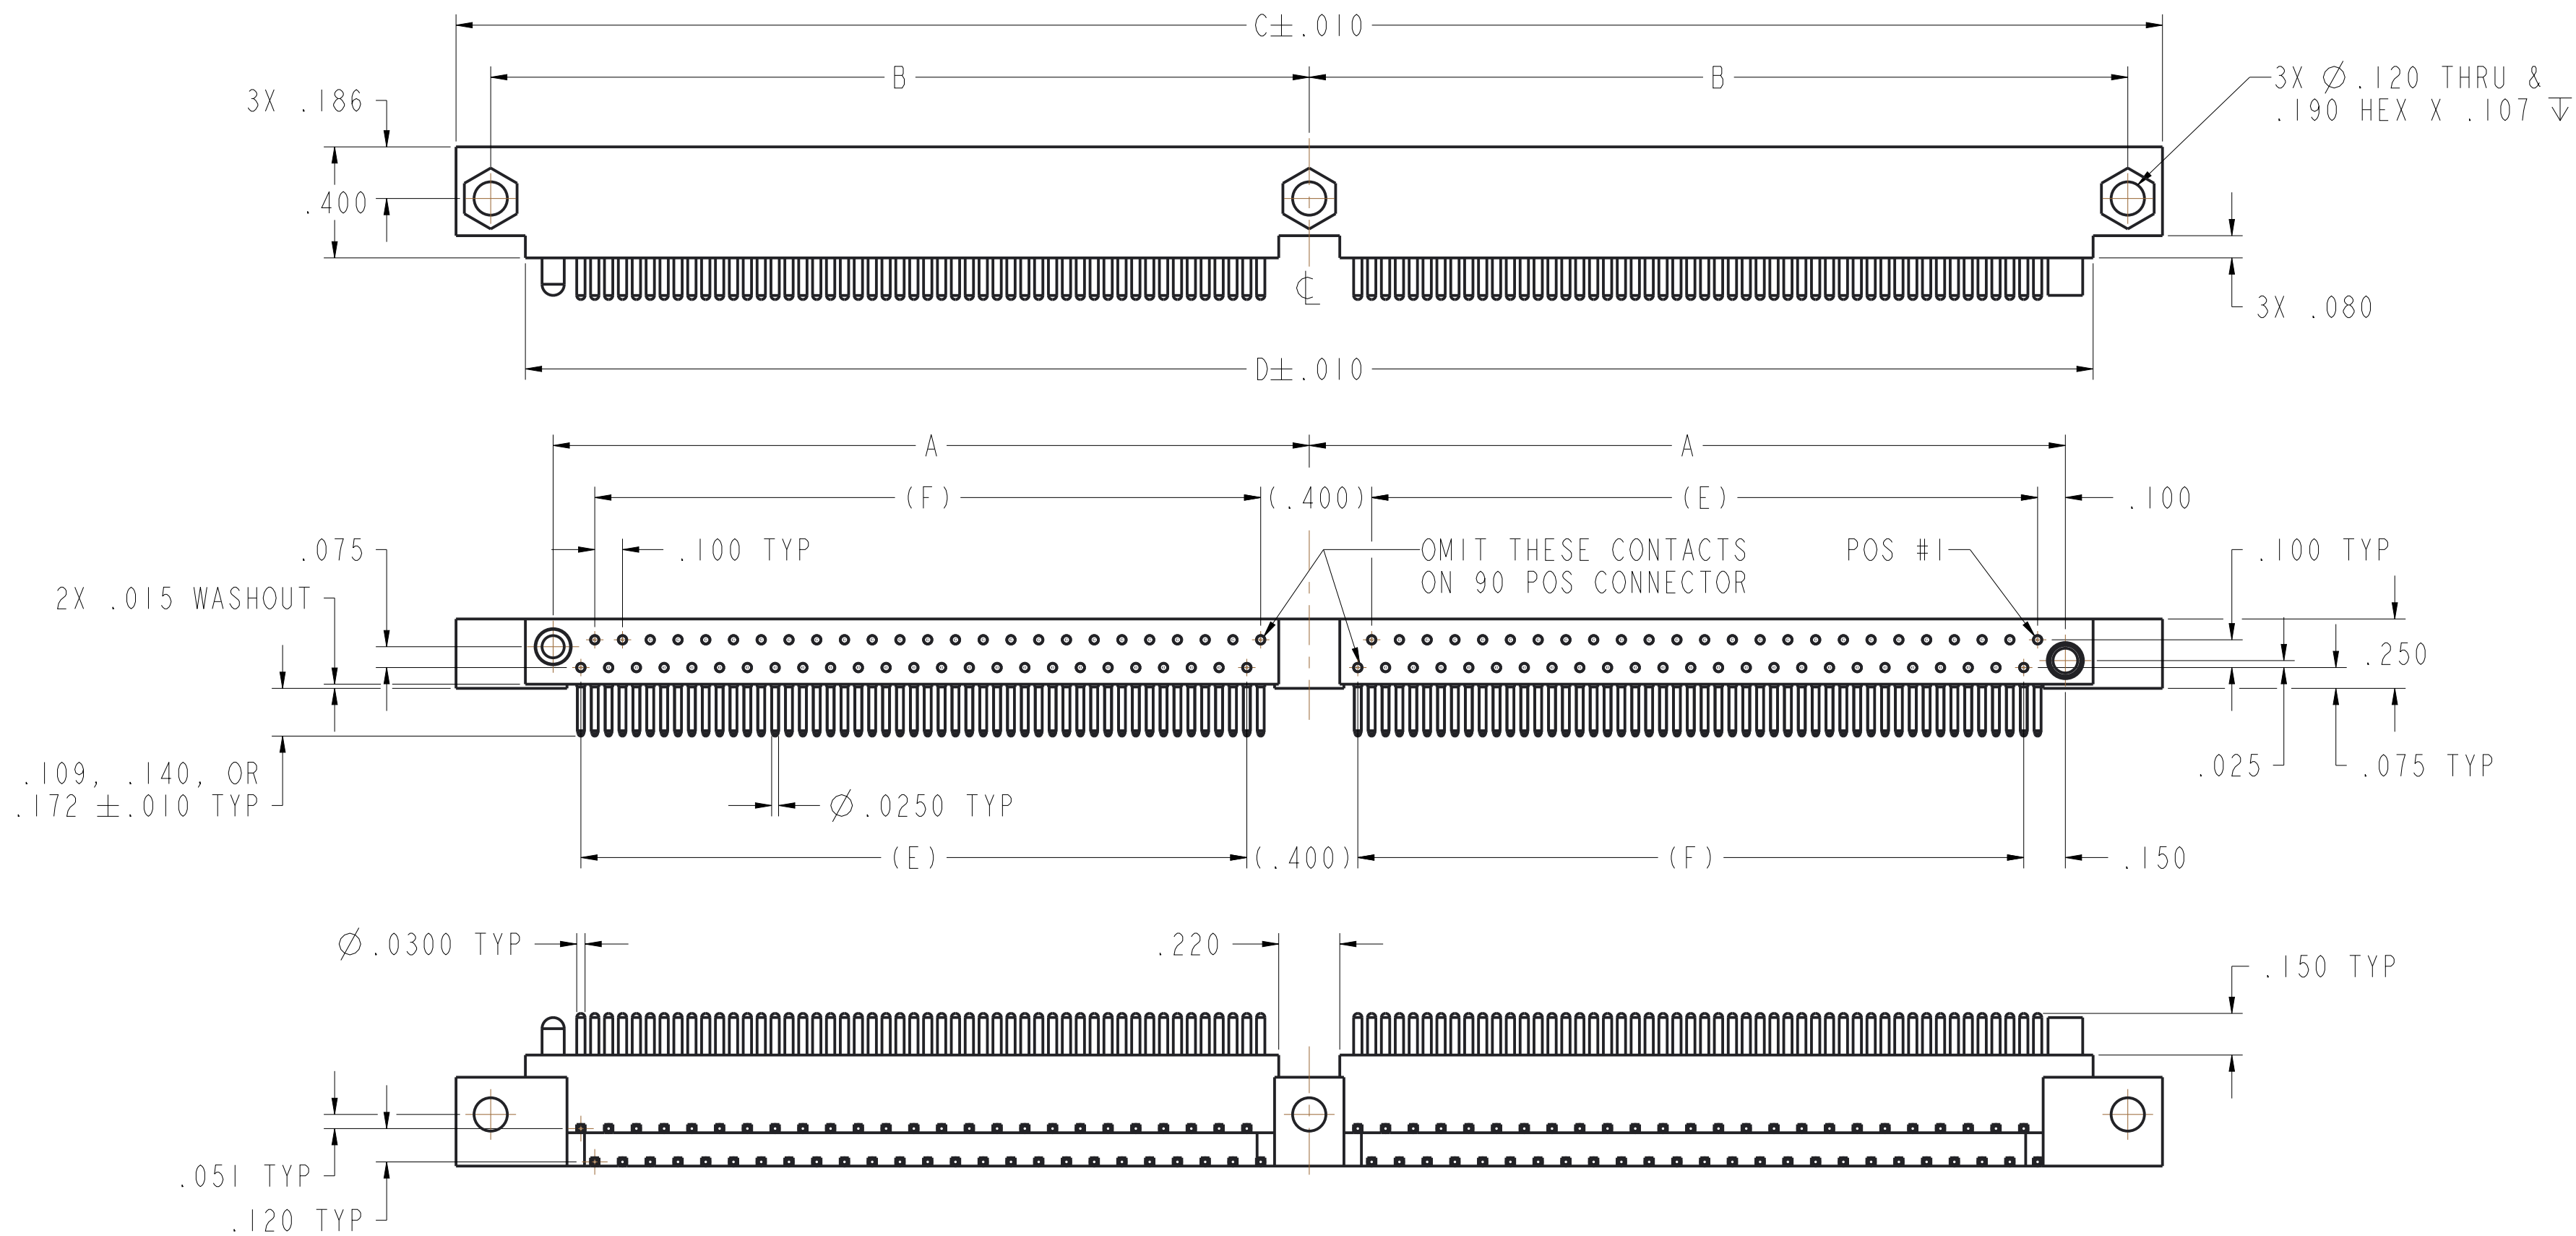


FIGURE 2. PLUG CONNECTOR, RIGHT ANGLE PIN CONTACTS (2 BAY)

CONTACT LAYOUT	DIMENSIONS					
	A	B	C	D	E	F
90	2.475	2.700	5.650	5.150	2.200	2.100
100	2.725	2.950	6.150	5.650	2.400	2.400
120	3.225	3.450	7.150	6.650	2.900	2.900

REFER TO DRAWING GTB-1002 FOR R/A PCB LAYOUT PATTERNS

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC. WITHOUT THE WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.

GLENAIR, INC.

1211 AIR WAY, GLENDALE, CALIFORNIA 91201

TITLE
PRINTED CIRCUIT BOARD CONNECTOR
R/A PLUG W/ MOUNTING EARS
22 AWG, .100" SPACING

CODE IDENT. NO.	SIZE	DWG NO	REV
06324	C	GTBA-RA	B
SCALE: N/A		WEIGHT: N/A	SHEET 3 OF 3

NOTES: UNLESS OTHERWISE SPECIFIED...

- ASSEMBLY TO BE IDENTIFIED WITH GLENAIR NAME, CAGE CODE, P/N, AND DATE CODE. NUMBERS INDICATING THE FIRST AND LAST POSITION AND EVERY FOURTH CONTACT POSITION IN BETWEEN SHALL BE MARKED ON THE TOP SIDE OF THE CONNECTOR.

