


### EMI Backshell for Series 792 Connectors

#### 799-164 EMI Banding Backshell for 792-001 and 792-002 Connectors

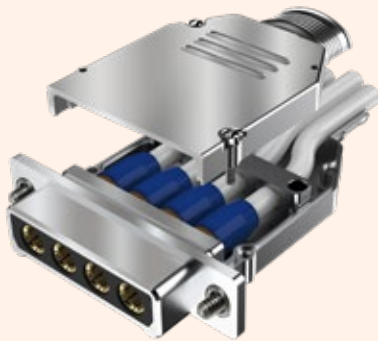

**Two piece. EMI protection.** 799-164 backshell is designed for Series 792 connectors with twinax, quadax or El Ochito® contacts. Internal cable clamp maintains proper cable/contact alignment. Non-environmental. Backshell fits securely into groove in connector shell. Fits 792-001 and 792-002 connectors.

How To Order							
	Sample P/N → 799-164	M	B	N	T	S	2
<b>Product</b>	799-164 = Split Backshell for 792-001 and -002						
<b>Shell Finish</b>	M = Electroless Nickel MT = Nickel-PTFE ZR = Black Zinc-Nickel						
<b>Shell Size</b>	A B C D E F						
<b>EMI Band Strap</b>	B = supplied with Standard Band (.250" width) M = supplied with Micro Band (.125" width) N = no band						
<b>Qwik-Ty Option</b>	T = Qwik-Ty included N = no Qwik-Ty						
<b>Lace Tie Option</b>	H = Lace tie holes included S = Lace tie Slots included N = No lace tie						
<b>Wire Outer Jacket Diameter</b>	1 = .188 inches maximum (4.76 mm.) 2 = .250 inches maximum (6.35 mm.) 3 = .313 inches maximum (7.94 mm.)						

#### Construction

- Shell: aluminum alloy
- Hardware: stainless steel, passivated

#### Dimensions

Shell Size	A Max		B Max		C	
	In.	mm.	In.	mm.	In.	mm.
<b>A</b>	.575	14.61	.810	20.57	2.38	60.5
<b>B</b>	.575	14.61	1.185	30.10	2.50	63.5
<b>C</b>	.575	14.61	1.560	39.62	2.88	73.2
<b>D</b>	.575	14.61	1.935	49.15	3.06	77.7
<b>E</b>	.575	14.61	2.310	58.67	3.25	82.6
<b>F</b>	.950	24.13	2.310	58.67	3.31	84.1

#### Band-Master ATS® Shield Termination System

Fast, cost-effective shield termination. Contact Glenair or visit our website ([glenair.com/bandmaster](http://glenair.com/bandmaster)) to view our complete line of **Band-Master ATS®** products, including pneumatic tools for high volume production and calibration kits.

